

NTB-20W, NTB-30W

止推垫圈 Thrust Washers




请从适用的内径、外径、厚度中选择零件号
(例)内径20mm、厚度1.5mm的情况下

NTB-20W - 2015

请指定上述零件号

●摩擦面为树脂层。

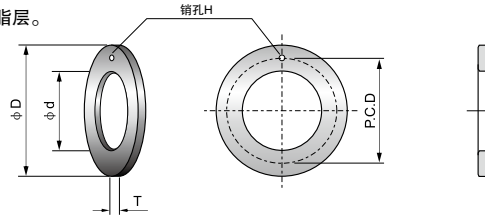

Parts No.	内径		外径		厚度		销孔	柱销位置	
	∅ d	$\begin{matrix} +0.25 \\ 0 \end{matrix}$	∅ D	$\begin{matrix} 0 \\ -0.25 \end{matrix}$	T	$\begin{matrix} 0 \\ -0.05 \end{matrix}$	H	P.C.D	± 0.12
NTB-20WC-1015	10		20		1.5		1.10 ~ 1.50	15	± 0.12
NTB-20WC-1215	12	"	24	"	"	"	1.625 ~ 1.875	18	"
NTB-20WC-1415	14	"	26	"	"	"	2.125 ~ 2.375	20	"
NTB-20WC-1615	16	"	30	"	"	"	"	22	"
NTB-20WC-1815	18	"	32	"	"	"	"	25	"
NTB-20WC-2015	20	"	36	"	"	"	3.125 ~ 3.375	28	"
NTB-20WC-2215	22	"	38	"	"	"	"	30	"
NTB-20WC-2415	24	"	42	"	"	"	"	33	"
NTB-20WC-2615	26	"	44	"	"	"	"	35	"
NTB-20WC-2815	28	"	48	"	"	"	4.125 ~ 4.375	38	"
NTB-20WC-3215	32	"	54	"	"	"	"	43	"
NTB-20WC-3815	38	"	62	"	"	"	"	50	"
NTB-20WC-4215	42	"	66	"	"	"	"	54	"
NTB-20WC-4820	48	"	74	"	2.0	"	"	61	"
NTB-20WC-5220	52	"	78	"	"	"	"	65	"
NTB-20WC-6220	62	"	90	"	"	"	"	76	"

注：本公司可以按客户需求，生产非标产品。Note: we can produce as per your drawings.